



Putzmeister

Your benefits

- Powerful machine – meets all requirements of the current “Stage V” emission category
- Powerful and quiet gasoline engine
- Lower maintenance cost compared to an equivalent diesel engine
- Large gasoline tank with 40 liters volume
- Large hopper with safety grid – ideal to be filled by truck mixer
- Light and robust plastic canopy
- Adjustable delivery rate
- Service-friendly, due to easily accessible parts

SP 20 GHF – Powerful machine for large self-levelling floor tasks




The SP 20 GHF is a worm pump for self-levelling floor screed applications. Equipped with a 4 cyl. Kubota 33 kW gasoline engine compliant with Stage V emission standard, this machine is very powerful and allows high delivery distances.

To guarantee continuous flow rate, even with metallic or synthetic fibers contained in the liquid screed, a new corner grid has been designed and a vibrator is equipped as standard. This pump can reach an output of 20 m³/h * and all needs of the users are fulfilled. The design has been optimized for more user-friendly service and maintenance. We use reliable and high quality components which increase the lifetime of your self-levelling floor screed pump.

For further information please contact your local Putzmeister dealer.

- **Calcium sulphate screed** (anhydrite)
- **Cement floor screed**



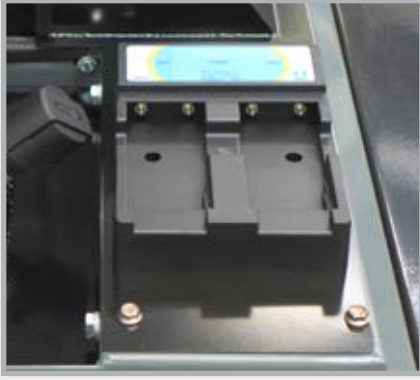

Optionally available with a battery charger. The radio remote control can therefore be charged on the construction site simply and without complication.



Operation of the machine directly from the control panel or via radio remote control



Lightweight, support wheel, stabilizing, HPC (option), remote control and adjustable output (5 speeds) with charger, makes your work more comfortable.

Technical data

SP 20 GHF

Feed hopper	220 l
Worm pump	7515
Delivery rate*	20 m ³ /h
Delivery pressure	20 bar
Delivery range**	200 m horizontal
Engine	4-cylinder Kubota gasoline; 33 kW Stage V
Weight	< 825 kg
Length × width × height	3,317 × 1,530 × 1,180 mm
Filling height	1,180 mm
Maximum particle size	8 mm
Chassis	unbraked, suitable for road use

* The delivery rate is theoretical and depends on the pump pressure.

** The data is based on experience and depends on the material properties.

Equipment

Car cable adapter	■
Car coupling	■
Grease cartridge	■
Hopper angle grill MW 10	■
Instruction manual and spare parts list	■
Lever press with hose	■
Lifting eye	■
Pressure connection V50	■
Pumping stop alarm	■
Radio remote control (with adjustable delivery rate, 5 steps)	■
Standard colour painting	■
Support leg	■
Support wheel	■
Tool box	■
Vibrator	■
Charging device, integrated	<input type="checkbox"/>
Chassis, braked	<input type="checkbox"/>
High pressure cleaner	<input type="checkbox"/>
Hopper vibrating screen MW 15	<input type="checkbox"/>
Pressure connection M50	<input type="checkbox"/>
Special canopy paint in RAL colours	<input type="checkbox"/>
Truck coupling	<input type="checkbox"/>

Optional Standard

Putzmeister Mörtelmaschinen GmbH

Max-Eyth-Straße 10 · 72631 Aichtal / Germany
P.O.Box 2152 · 72629 Aichtal / Germany
Tel. +49 7127 599-0 · Fax +49 7127 599-743
mm@putzmeister.com · www.putzmeister.com

